

## 应用领域 | Application


- 专业安防模拟录像机 | Professional DVR



## 产品特点 | Features

- 支持多路高清 (1080p/720p) 和多路标清 (D1/960H) DVR  
Support multiple channels HD and SD DVR
- 支持高性能H265&H264视频编解码  
Support high performance H.265/H.264 video codec.
- 支持HDMI/VGA 高清显示输出接口  
Support HDMI/VGA video display.
- 支持SATA/USB/Ethernet丰富接口  
Support SATA/USB/Ethernet peripherals.

## 主要模块 | Block Diagram

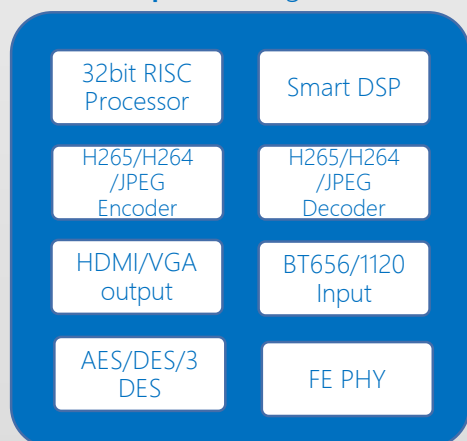

## 产品规格 | Specifications

|              |                                                                                                                                             |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| CPU          | Dual Core CPU<br>Support up to 1.3GHz                                                                                                       |
| Video codec  | Encoder: 2x1080p@30fps H265/H264, 1080p@30fps JPEG<br>Decoder: 2x1080p@30fps H265/H264, 1080p@30fps JPEG                                    |
| DSP          | Smart DSP                                                                                                                                   |
| Video Input  | 2 8bit BT656 port or 1 16bit BT1120 input up to 4x1080p@30fps                                                                               |
| Video Output | 1xHDMI 1.4b output, support up to 4096x2160@30fps<br>1xVGA output, support up to 1080p@60fps<br>1xCVBS output                               |
| Memory       | 16bit 1866Mbps DDR3, up to 1GB<br>1xSPI NOR/NAND Flash                                                                                      |
| Network      | 1 internal FE PHY or external Gigabits Ports                                                                                                |
| Peripherals  | 1xSATA3, 2xUSB2<br>3xI2S, 3xUART, 1xI 2C, 1xIR, GPIO                                                                                        |
| Package      | TFBGA341, 14mmx14mm                                                                                                                         |
| Others       | Working temperature: -20°C~70°C<br>Typical power consumption: 2W<br>Power supply: Analog: 3.3v, IO: 3.3v/1.8v, Digital: CPU-1.0v, CORE-0.9v |

### 上海 | Shanghai

上海市徐汇区宜山路717号6楼  
717 Yishan Road, Block 2, Floor 6, Xuhui District, Shanghai.  
Tel: +86 21 6112 1558, Fax: +86 21 6406 6786

### 深圳 | Shenzhen

南山区高新南一道008号创维大厦A座606  
Room 606, Skyworth Tower A, No.008 Gaoxin South 1st Road, NanShan District, ShenZhen  
Tel: +86 0755 86255308

sales@fullhan.com  
fae@fullhan.com  
www.fullhan.com  
stock: 300613.sz

