

应用领域 | Application


- 专业模拟录像机 | Professional DVR



产品特点 | Features

- 支持多路高清 (1080p/720p) 和多路标清 (D1/960H) DVR
Support multiple channels HD and SD DVR
- 支持高性能H265&H264视频编解码
Support high performance H.265/H.264 video codec.
- 支持HDMI/VGA 高清显示输出接口
Support HDMI/VGA video display.
- 支持SATA/USB/Ethernet丰富接口
Support SATA/USB/Ethernet peripherals.

主要模块 | Block Diagram

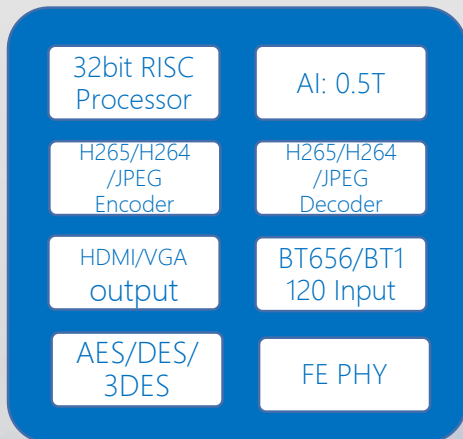

产品规格 | Specifications

CPU	Dual Core CPU Support up to 1.5GHz
Video codec	Encoder: 4x1080p@30fps H265/H264, 2x1080p@30fps JPEG Decoder: 4x1080p@30fps H265/H264, 2x1080p@30fps JPEG
NPU	NN 0.5TOPs for AI Application
Video Output	1xHDMI 1.4b output, support up to 4096x2160@30fps 1xVGA output, support up to 1080p@60fps 1xCVBS output
Memory	32bit 2133Mbps/DDR3, 2400Mbps/DDR4, up to 3GB 1xSPI NOR/NAND Flash
Network	1 internal FE PHY and 1 external Gigabit PHY
Peripherals	2xSATA3, 2xUSB2 3xI2S, 3xUART, 1xI2C, 1xIR, GPIO
Package	TFBGA441, 19mmx19mm
Others	Working temperature: -20°C~70°C Typical power consumption: 2.8W Power supply: Analog: 3.3v, IO: 3.3v/1.8v, Digital: CPU-1.0v, CORE-0.9v

上海 | Shanghai
上海市徐汇区宜山路717号6楼
717 Yishan Road, Block 2, Floor
6, Xuhui District, Shanghai.
Tel: +86 21 6112 1558,
Fax: +86 21 6406 6786

深圳 | Shenzhen
龙岗区天安云谷6栋东座1005-1007
Room 1005-1007, Cloud Park
Building 6 East,
Longgang District, ShenZhen
Tel: +86 0755 86255308

成都 | Chengdu
双流区双兴大道1号电子科大
科技园B区6栋3层
UESTC Campus, B, 6#, 3rd
floor, Shuangliu,
Chengdu
Tel: +86 028 85783758

杭州 | Hangzhou
杭州市滨江区西兴街道物联
网街277号中胜大厦
Wulianwang road 277,
Zhongsheng Building,
Binjiang, Hangzhou.
Tel: +86 18001983519

sales@fullhan.com
marketing@fullhan.com
www.fullhan.com
stock: 300613.sz

